

EnviraLuxe Awning Windows


Thermally broken aluminium



A STYLISH, HIGH PERFORMING CHOICE.

EnviraLuxe is the choice for discerning Australian homes, with architecturally inspired designs, bold frames and oversized window openings. The hardware and performance are sure to impress, with factory-fitted seals providing improved acoustic performance and resistance to dust, wind and water penetration.

- Straight-cut deep sashes and square robust, modern frame supports bigger windows and better acoustics.
- Awning design enables all-weather ventilation.
- Factory-fitted performance window seals offer improved noise insulation and prevent dust, water and wind penetration.
- Larger sizes available including 2318h x 1122w lites.
- Configuration options allow for greater flexibility and bigger windows.
- Chain winder features an integrated lock. The stainless-steel chain offers durability and reliability.
- Restricted opening option for fall prevention.
- All windows keyed alike. Use one key for multiple windows.
- On larger windows, modern low-profile cam catches ensure a tight seal.
- High performance and energy-efficient double-glazing prevents heat transfer between inside and outside, reduces energy bills and offers year-round comfort.
- A range of glazing options to improve the comfort, serenity, security and privacy.
- 20-24mm glazing pocket allows for custom high-performance energy efficient and acoustic glass.

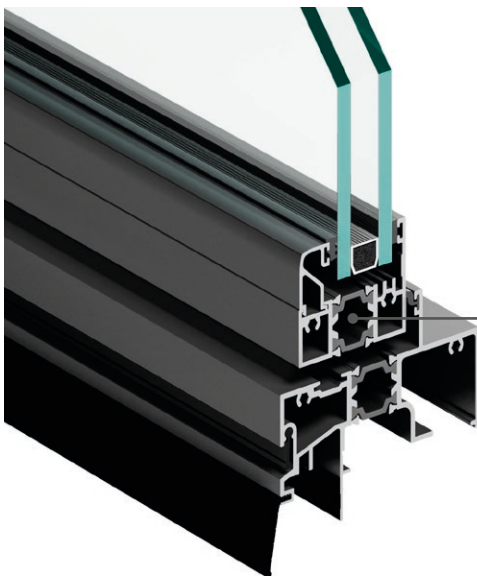

Thermally Broken Frames

Prevent heat transfer, improve energy efficiency, and offer low maintenance and durability.

EnviraLuxe Awning Windows




Thermally broken aluminium

SPECIFICATIONS

Product	Awning Window
Product Series	EnviraLuxe
Frame Profile	88mm x 35mm
Sill Options	N/A
Max Frame	6000mm high
Max Sash	618mm high x 2632mm wide 2318mm high x 1122mm wide Max weight 80kgs
Sash Profile	Stiles – 50mm, bottom rail – 40mm, top rail – 40mm
Glazing	20mm – 24mm Double glazing only
Bal Rating	BAL40
Seal Type	PVC bulb seal
Colour Options	Black Matt, Monument Matt, Surfmist Satin, White Gloss
Screen Options	Flyscreen and barrier screens
Hardware Options	Chain winder – Black, White, Monument and Brushed Nickel Cam catch – Black, White, Monument and Surfmist
Installation Options	By builder or Stegbar installation service
Warranty	10-year warranty

For full range of configurations and standard sizes refer to the standard size and range charts.

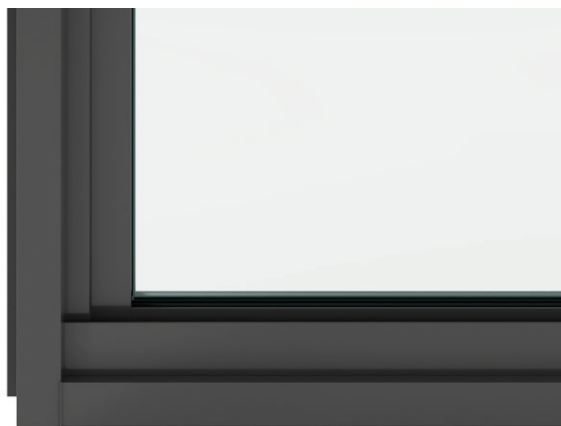

Bold modern frame

Maximise natural light with large expanses of glass and achieve a uniform look across all windows and doors with straight-cut sashes.

PERFORMANCE

Acoustic Performance	
Performance Criteria	Glass Type
RW33	Double glazing – 4/12Ar/4
RW37	Double glazing – 4/10Ar/6.38 Lam
RW37	Double glazing – 4/10Ar/6.5 Vlam Hush
RW38	Double glazing – 6/8Ar/10.38 Lam
RW40	Double glazing – 4/8Ar/12.76 Lam
Wind & Water Performance	
Performance Criteria	Rating
SLS	1200Pa
ULS	3000Pa
Water	450Pa
N Rating	N4 Corner/N5
Thermal Performance	
Performance Criteria	Rating
Double Glazed Uw Range	2.1 - 3.0
Double Glazed SHGC Range	0.17 - 0.51

EnviraLuxe Awning Windows



Thermally broken aluminium

HARDWARE



Chain Winder



Cam Catch

SCREENS



Aluminium screen
fixed internally.



Aluminium screen
fixed internally,
with cam catches.

Whilst the utmost care is taken to ensure the accuracy of the information contained herein, it is provided in the understanding that the company shall under no circumstances be liable for any injuries, expenses or other losses which may in any way be attributable to the use or adoption of such data and/or design details. Stegbar reserves the right to alter or amend without prior notice data and design details specified herein. stegbar.com.au JWSNAT0600/0723